


WWW.BEAUROC.COM



MULTI-PURPOSE BODY LINE

PRODUCT CATALOGUE

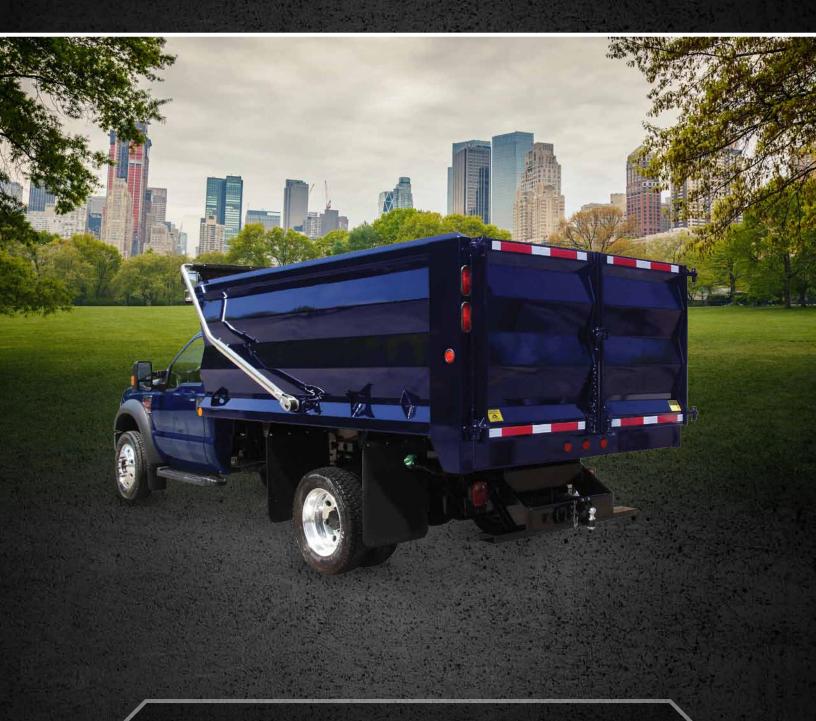







MATERIALS

SPECIFICATIONS









MPLD		MPMD	MPHD*	CCS	CCL
3" x 4" x 3/16	" tubing 3	3" x 4" x 3/16" tubing	4" x 4" x 1/4" tubing	Not applicable	Not applicable
10g (0.134") -	- A-36 3	3/16" – Domex 100W	4.5 mm (3/16") – HARDOX 450	10g (0.134") – A-36	10g (0.134") – A-36
10g (0.134") -	- A-36 3	3/16" – Domex 100W	4.5 mm (3/16") – HARDOX 450	10g (0.134") – A-36	10g (0.134") – A-36
12g (0.1046")	– A-36 1	1g (0.1196") – Domex 100W	4 mm (5/32") – HARDOX 450	11g (0.1196") – Domex 100W	12g (0.1046") – A-36
3/16" - 44-W	3	3/16" – Domex 100W	1/4" – HARDOX 450	10g (0.134") – A-36	10g (0.134") – A-36
8" C-channel support flange		o onamor man	8" I-beam with support flange	8" formed or channel long sills – 3/16" 44W	8" formed or channel long sills – 3/16" 44W
2,845 lbs Based on a 12' x			8,950 lbs Based on a 23' x 60" x 96" MPHD	4,260 lbs Based on a 14' x 84" x 32" CCS	3,880 lbs Based on a 14' x 60" x 20" CCL
87"	8	37"	86"-88" trapezoidal design	94"	94"
10' to 18'	1	0' to 18'	15' to 30'	10' to 18'	10' to 18'
48", 54" & 60	' 4	18", 54" & 60"	60", 66", 72", 84" & 96"	60", 72", 84"	60", 72", 84"
16", 32", 48",	54" & 60" 1	6", 32", 48", 54" & 60"	60", 66", 72", 84" & 96"	20" & 32"	20" & 32"
Same as side	neight S	Same as side height	48" & 60"	Same as side height	Same as side height
Underbody hoi	st U	Inderbody hoist	Front mount telescopic	Front mount & underbody hoist	Front mount & underbody hoist

TOP RAIL

SIDES

FRONT

TAILGATE

FLOOR

SILLS

BODY WEIGHT

STANDARD INSIDE WIDTH

STANDARD BODY LENGTHS

STANDARD SIDE HEIGHTS

STANDARD TAILGATE HEIGHTS

STANDARD FRONT HEIGHTS

STANDARD HOIST SYSTEM

MPLD & MPMD Options:

- Side door: 10g (0.134") A-36 with 3"x 4" x 3/16" tubing x 52" wide
- Double barn (swing) tailgate
- Upper split mesh barn door (available with 16" double acting tailgate only)
- Removable roof top (2 sections)

* Non-Dumping Model Available (MPHDN) Grapple hooks shown with MPMD & MPHD are dealer installed systems

Chipper Body Options:

- Removable top model CCL-RT (60" side height only)
- Ladder insert (available on both CCS & CCL models)
- Double barn door (available on both CCS & CCL models)

MATERIALS LEGEND:

A-36 – 65,000 psi	44W - 80,000 psi
Domex 100W - 115,000 psi *	HARDOX 450 – 215,000 psi
*Weather resistant steel	psi value = typical tensile



300 Universelle Street Vars, Ontario, Canada KOA 3H0 Tel: 613.443.0044 – Fax: 613.443.1138