

»» Two Stage Oneway


North America's leading innovator of snow & ice control equipment!
www.vikingcives.com



2 Stage Oneway Plow

Standard Features:

- Designed in same style as our standard oneway
- When plowing, second stage can be air activated independently
- Reinforced with (8) ½" plasma cut ribs
- Adjusting stabilizing arm
- Oscillating push lugs
- Tubular pushframe
- (2) adjustable shoe brackets
- Compression spring trip
- Replaceable spring teeth follow road contour

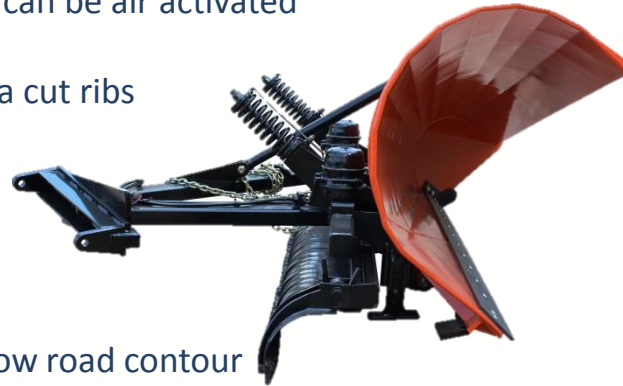

Options:

- ✓ Custom Moldboard Sizes
- ✓ Various Cutting Edge Materials
- ✓ Moldboard & Curb Shoes
- ✓ Various Style Pushframe Shoes
- ✓ Rubber Deflector
- ✓ Plow Marker
- ✓ Other Swivel Attachments



Plow Model	Height	Path Min/Max	Weight
2654HS9	26" to 54"	9'	3200
3564HS9	35" to 64"	9'	3290
4572HS9	45" to 72"	9'	3490
2654HSE9	26" to 54"	9'	3250
3564HSE9	35" to 64"	9'	3340
4572HSE9	45" to 72"	9'	3550